

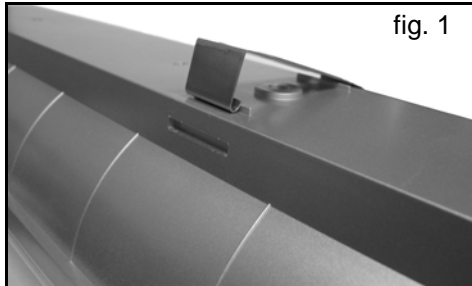
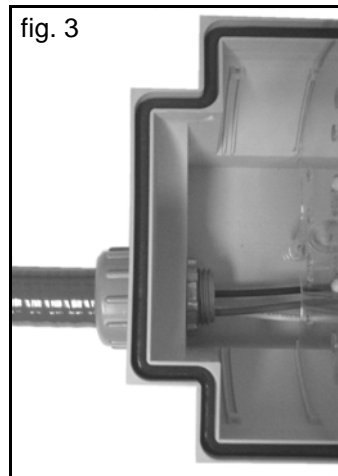


Read and understand these instructions before installing or servicing this luminaire.
SAVE THESE INSTRUCTIONS

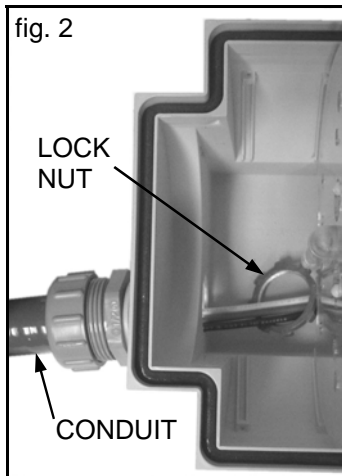




- Attach brackets to ceiling or suspension: see dimension diagram on page 2.
- Luminaire snaps into brackets (fig. 1).



- Flexible non-metallic CONDUIT must be secured to luminaire with LOCK NUT. (fig. 2 and 3)


Make connections:

- black luminaire lead to hot (black) supply lead; white luminaire lead to neutral (white) supply lead; green luminaire lead to ground (green) supply lead.
- Install lamp(s): see relamp label for correct lamp type and wattage.
- Install louver: make sure clips engage windows. (fig. 6)
- Attach lens cover: push bottom of latch over lip (fig 4), then push top of latch toward luminaire to secure (fig. 5).

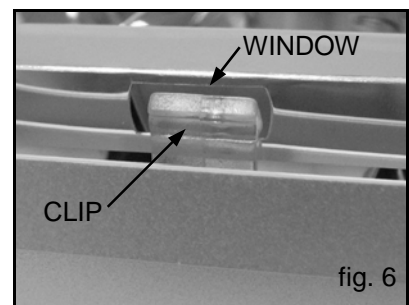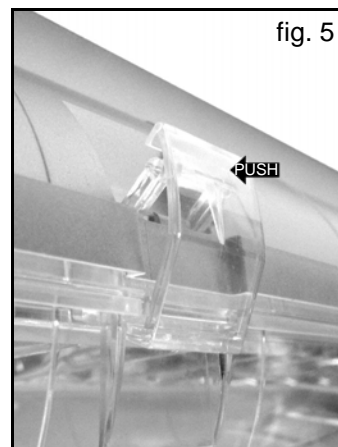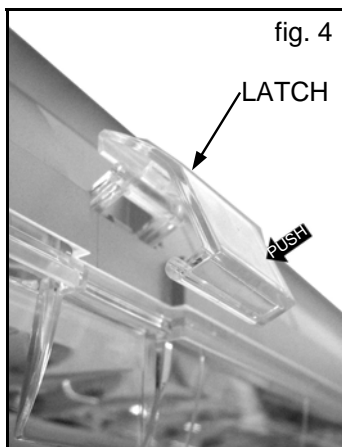


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Dimension Diagram

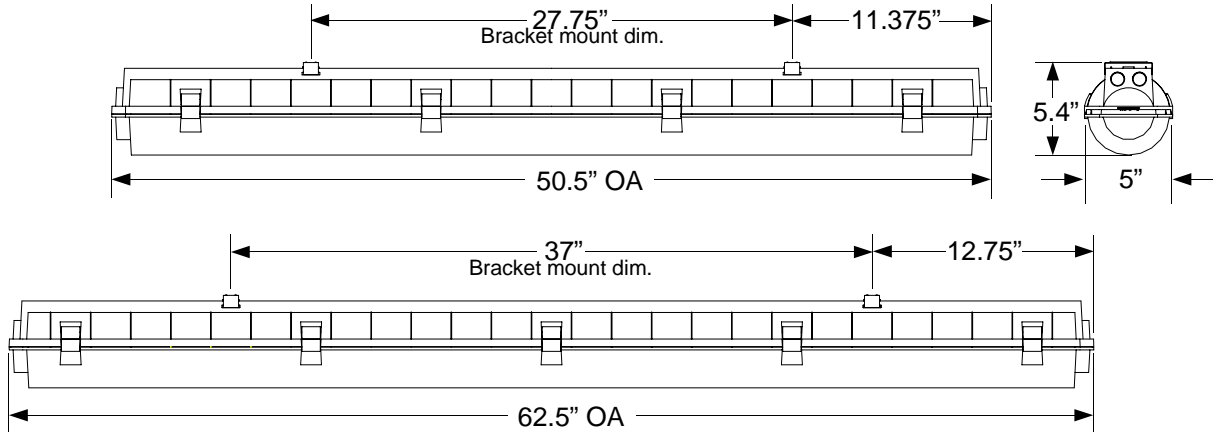


Wiring Diagrams

2 LAMPS ELECTRONIC BALLAST

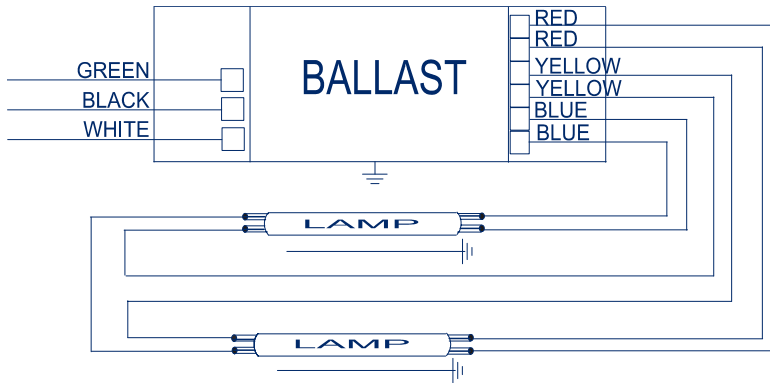


1 LAMP ELECTRONIC BALLAST

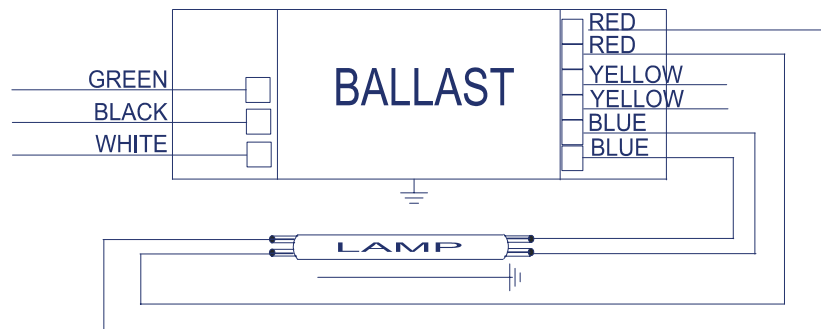


For 1 lamp operation, do not use yellow leads

2 LAMPS MAGNETIC BALLAST

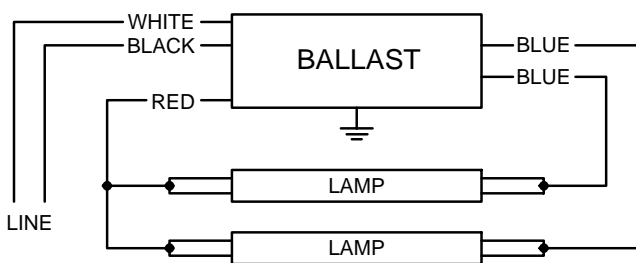

1 LAMP MAGNETIC BALLAST

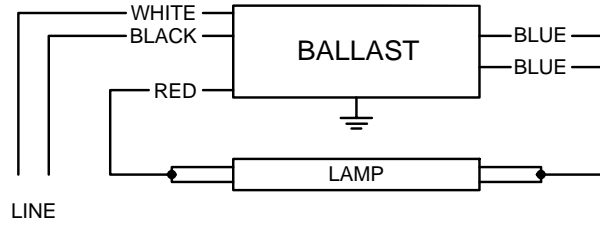

cap unused blue lead for 1000V